

BlueWave[®] AX-550

Recipe Storage Upgrade

Recipe storage is a new feature of BlueWave[®] AX-550 firmware version 2.5. This feature allows the user to save up to eight (8) different recipes and recall these recipes when needed. Each recipe is combined with TIME and POWER setting.

1. The recipe storage feature is available in admin mode only. Refer to the user guide on how to enter admin mode. In admin mode, there is an additional folder icon next to lock icon (Figure 1).
2. Turn the rotary push-button to move the highlighted cursor (blue) on to the folder icon. Turning the rotary push-button back and forth will allow the cursor to scroll through the main interface screen along the path shown by the red arrow in Figure 2.

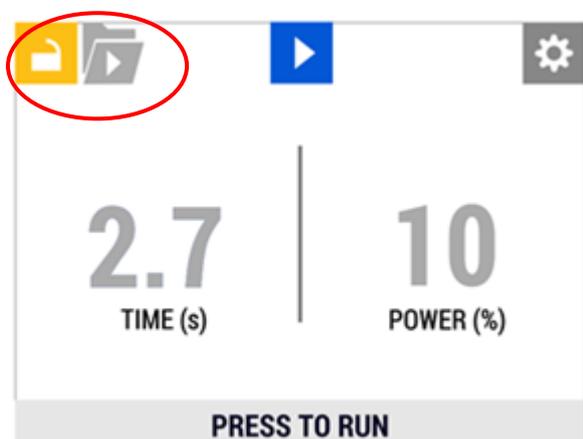


Figure 1. Admin Mode

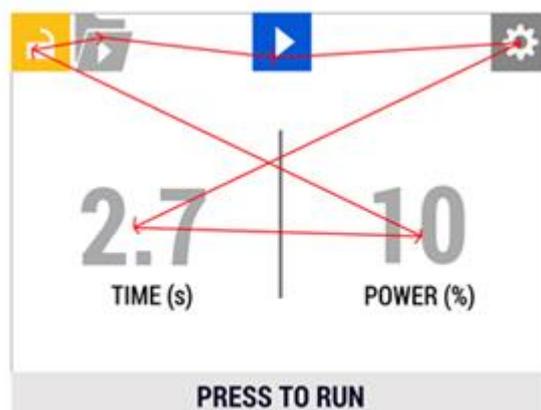


Figure 2. Cursor Path

3. When the cursor is on top of the folder icon, the lower bar should read "PRESS TO LOAD/SAVE" (Figure 3).
4. Press the rotary push-button when the cursor is on the folder icon.
5. The recipes screen will appear (Figure 4). Eight recipes will be visible with their TIME and POWER parameters.

NOTE: All zeros in initial firmware install.

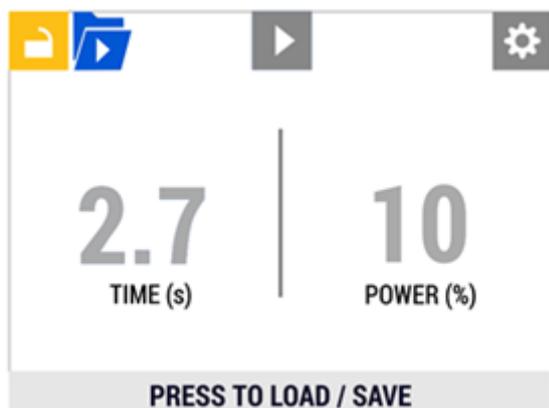


Figure 3. LOAD/SAVE



Figure 4. Recipes

- In the recipes screen, rotating the pushbutton will navigate the highlight cursor through the screen along the path shown by the red arrows in Figure 5. The cursor toggles between **SAVE**, **LOAD** and **BACK** (the up arrow).
- When the cursor is on **SAVE**, the bottom bar should read "PRESS TO SAVE " (Figure 6). Pressing the rotary pushbutton will save the current setting on the main screen into the selected recipe. The **Time** and **Power** value on the screen will be overwritten to the current setting.



Figure 5. Navigation



Figure 6. Press to Save

- After pressing **SAVE**, the "SAVE SUCCESS" screen will show for approximately 1.5 seconds (Figure 7).
- When the cursor is on **LOAD**, the bottom bar should read "PRESS TO LOAD" (Figure 8). Pressing the rotary pushbutton will load the **Time** and **Power** value in the selected recipe to current setting. User can see the **Time** and **Power** value changed when they return to the main screen.



Figure 7. Save Success



Figure 8. Press to Load

- After pressing **LOAD**, the "LOAD SUCCESS" screen will show for approximately 1.5 seconds (Figure 9).
- When the cursor is on **BACK**, pressing the rotary push button will go back to the recipes screen (Figure 10).

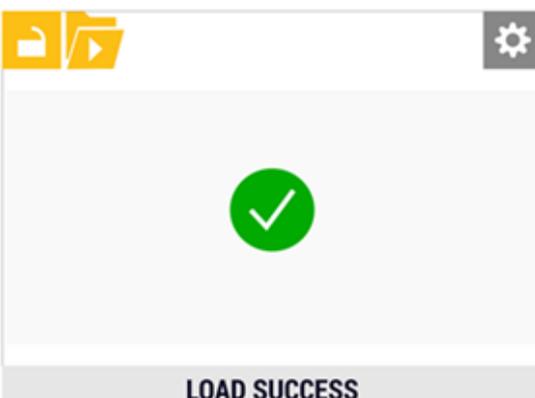


Figure 9. Load Success



Figure 10. Back

12. Pressing the rotary push-button again when the cursor is on the **BACK** button in the recipes screen you will go back to the main menu (Figure 11).



Figure 11. Main Menu (Admin Mode)



© 2019 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Please note that most dispensing and curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax recommends that any intended application be evaluated and tested by the user to ensure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation by offering equipment trial rental and leasing programs to assist in such testing and evaluations. Data sheets are available for valve controllers or pressure pots upon request.

10/14/2019 QS095DA

Dymax Corporation
+1.860.482.1010 | info@dymax.com | www.dymax.com

Dymax Europe GmbH
+49 (0) 611.962.7900 | info_de@dymax.com | www.dymax.de

Dymax Engineering Adhesives Ireland Ltd.
+353 21.237.3016 | info_ie@dymax.com | www.dymax.ie

Dymax Oligomers & Coatings
+1.860.626.7006 | info_oc@dymax.com | www.dymax-oc.com

Dymax UV Adhesives & Equipment (Shanghai) Co. Ltd.
+86.21.37285759 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax UV Adhesives & Equipment (Shenzhen) Co. Ltd.
+86.755.83485759 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax Asia (H.K.) Limited
+852.2460.7038 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax Asia Pacific Pte. Ltd.
+65.6752.2887 | info_ap@dymax.com | www.dymax-ap.com

Dymax Korea LLC
+82.2.784.3434 | info_kr@dymax.com | www.dymax.com/kr