
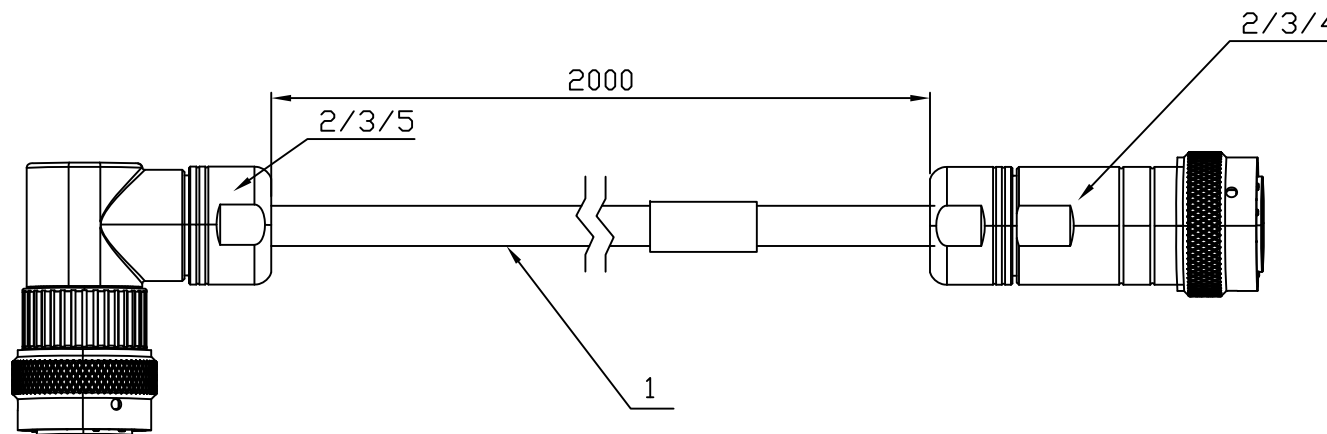


version	description	issued by	date
A	INITAIL RELEASE	Kyo	2021/11/23

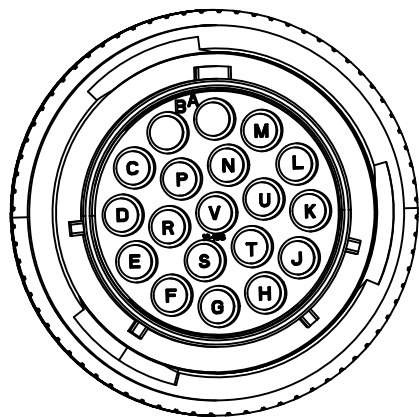

5	Cord Grip	Angle 90°, Amphenol	1	PCS
4	Cord Grip	Angle 180°, Amphenol	1	PCS
3	Contact	Contact,Female,	30	PCS
2	Plug	Socket,19P	2	PCS
1	Cable	15-Core Cable	2	M
ITEM NO	NAME	DESCRIPTION	QTY	UNIT

NOTE:  
 WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610, "ACCEPTABILITY OF ELECTRONIC ASSEMBLIES" (CLASS 2) AND IPC/WHMA-A-620, "REQUIREMENTS AND ACCEPTANCE FOR CABLE AND WIRE HARNESS" (CLASS 2) AS APPLICABLE AND UNLESS OTHERWISE NOTED

PROPRIETARY AND CONFIDENTIAL  
 INFORMATION IN THIS DOCUMENT IS CONFIDENTIAL AND PROPRIETARY TO DYNAMAX CORPORATION. COPYING, REPRODUCING OR THE USE OF THIS INFORMATION FOR ANY PURPOSE OTHER THAN TO PERFORM WORK FOR DYNAMAX CORPORATION WITHOUT THE EXPRESSED WRITTEN PERMISSION OF DYNAMAX CORPORATION, IS PROHIBITED AND UNLAWFUL.

TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN	DATE
DIMENSIONS ARE IN INCHES		Kyo	2021/11/23
FRACTIONAL	± 1/32	CHECKED	DATE
ONE PLACE DECIMAL	X ± .03	LHW	2021/11/23
TWO PLACE DECIMAL	XX ± .01	MANUFACTURING	DATE
THREE PLACE DECIMAL	XXX ± .005	G.A.	DATE
ANGULAR	± 1°	SCALE: 1:2	SHEET 1 OF 1
REMOVE ALL BURRS & BREAK SHARP EDGES 1 - .3 R. OR CHAMFER		SIZE	DWG. NO.
		A3	84026

		TITLE:	CABLE,FX1250,2M, TYPE I to L
		REV	A